


*** DANGER - CAUTION ***


Always Lower The Boat Lift Before Attempting Assembly.




1. Lower the Boat Lift.
2. Remove the Wheel.
3. Remove the Brake Dog as Shown.

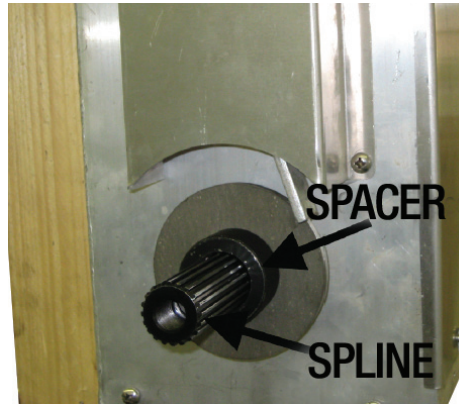


4. Install the Spline on the Winch Shaft.
5. Install the Collar Spacer.

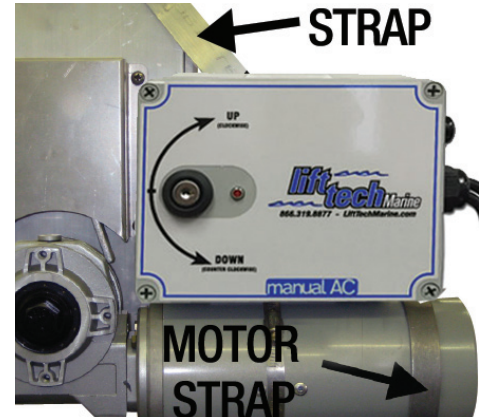


6. Slide the Motor onto the Spline.
7. Install the Motor Strap and Mounting Strap in a Horizontal Position as Shown.

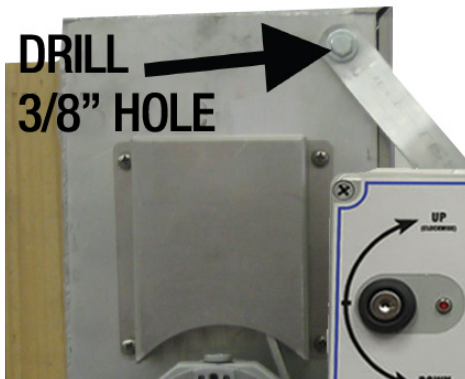

8. Drill a 3/8" Hole in the Winch Box. Mount Strap as Shown.

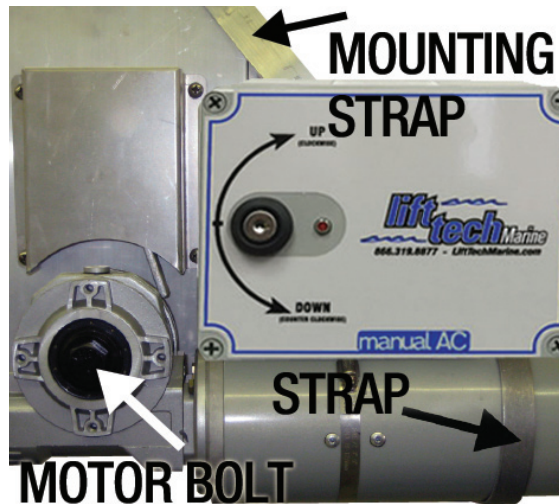

9. Install the Black Washer and Motor Bolt. Tighten to Approximately 70 Foot Pounds.
10. Tighten all the Bolts.

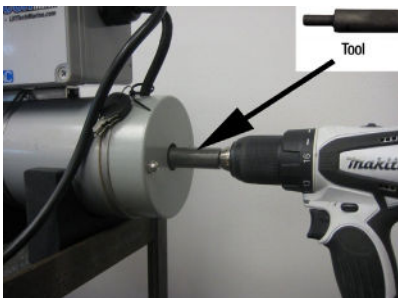

In Case of a Power Outage This Tool May be Inserted Into a Drill to Raise or Lower Your Lift. First Remove Rubber Cap From Motor Shaft.

Recommended Extension Cords up to 150 feet 12/3. Any question regarding electrical current requirements please call your Authorized Dealer or Lift Tech Marine 1-866-319-8877.

*** DANGER - CAUTION ***

All Power Used on Your Dock or Lift Needs to be GFI Protected at the Shoreline.